


MEDIA PLAYER

MP1000

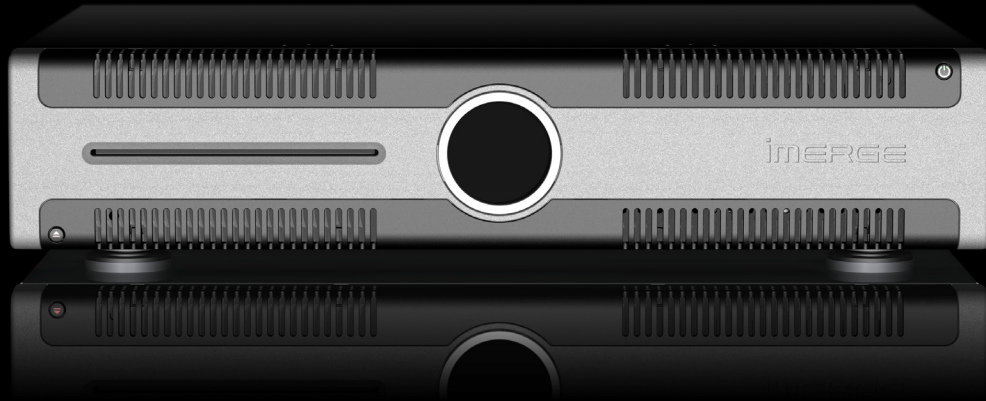


Expanding possibilities

Expand the number of independent playback sources and control interfaces in an MS5000-based multi-room system with the MP1000 media player

- A completely independent additional video or music source, with an integral TV control interface, for the Imerge MS5000 MediaServer
- Multiple MP1000s can be connected to a single MS5000 MediaServer to enable more people to play video and music both independently and simultaneously
- Media playback from MS5000 and from local DVD/CD reduces the number of system devices
- Integral optical drive provides content recording* (upload) to the host MS5000 server with automated music/video metadata look-up
- Near-silent operation extends the possibilities to use in-room as the primary A/V device
- Superb design offers both in-room and rack-mount configurations (rack-mount kit included)
- Extensive media browsing, searching, playback and editing capabilities offer an impressive and state-of-the-art entertainment experience
- On-line software upgrades allow feature expansion without replacing the device
- Videophile-grade 1080p output, and upscaling of standard definition content to high definition resolution, create stunning video playback
- Custom-designed, audiophile-grade electronics, with Wolfson Delta-Sigma 24-bit DACs, offer refined, class-leading sound reproduction
- TV control interface hue can be matched to suit the room décor independently from other MP1000s and the host MS5000
- Integrated IR control (front and rear) requires no external conversion boxes
- Built-in web browser interface offers convenient computer-based control and administration
- MP1000s and host MS5000 controllable via a single XiVA-Link connection for easy integration
- Industry-leading customer support teams in the UK and the USA

imerge

System Connectivity Example

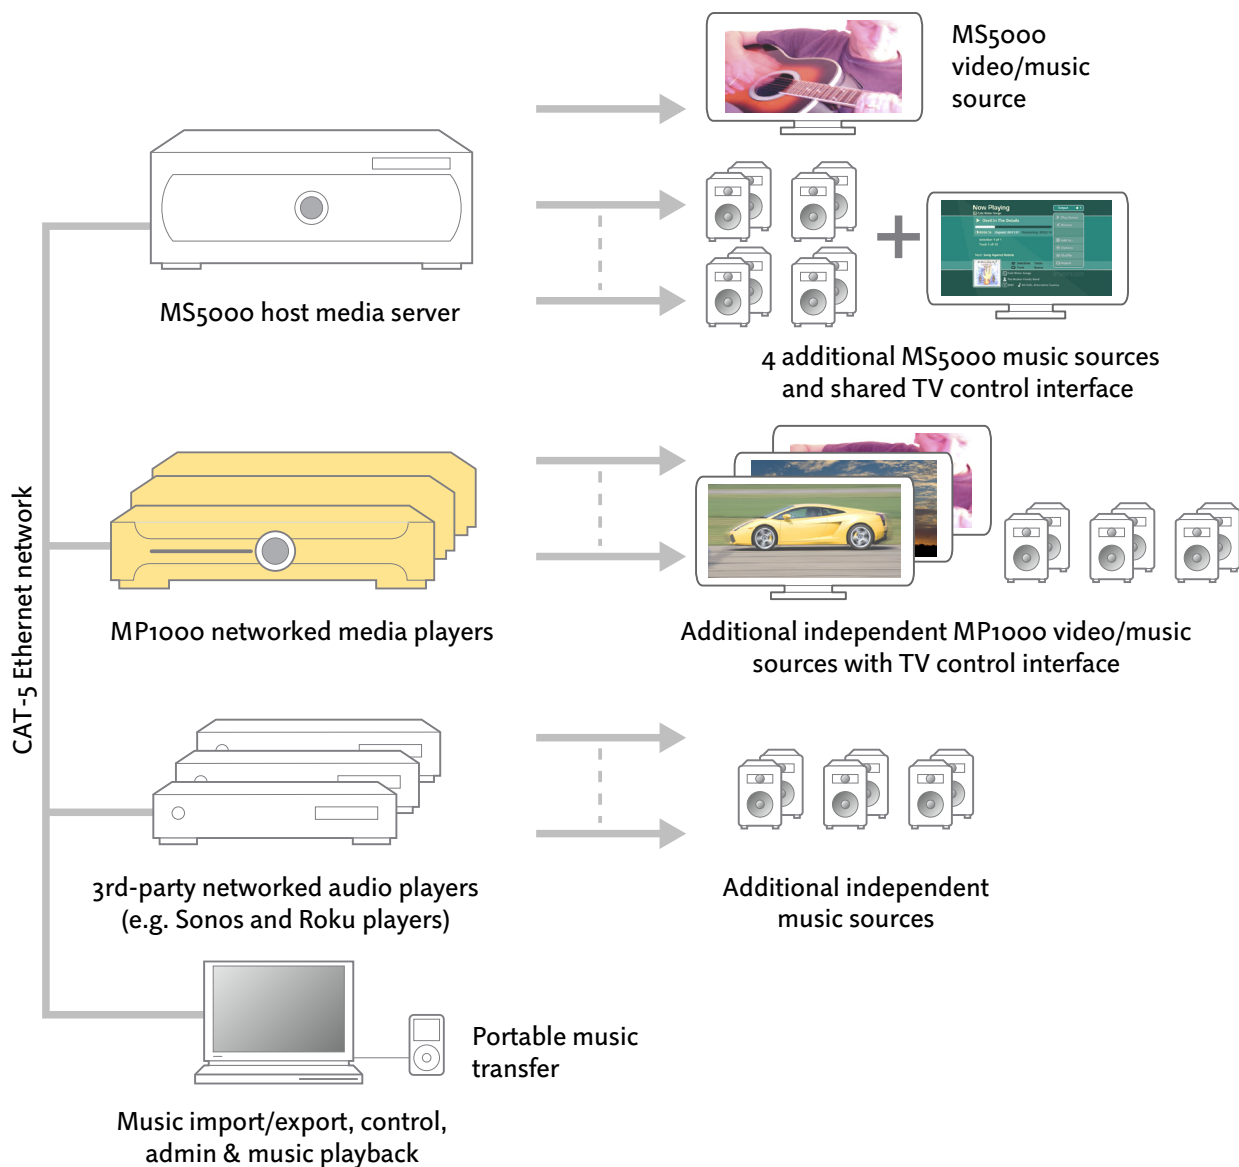

Technical Data

Media Format Support: Video: Unencrypted DVD Video (.VOB), DVD Video (from optical drive); Audio: Uncompressed (WAV), MP3, WMA (non-DRM), CD-DA (from local optical drive). Format support is upgradable via future on-line software updates

A/V video & user interface output: Up to 1080p on DVI/HDMI connector

A/V video & user interface output: Component (Y Pr Pb); 4-pin mini-DIN S-Video; RCA composite

Audiophile-grade line-level audio output for music and 2-channel A/V audio downmix, RCA/phono L&R Wolfson Delta-Sigma 24-bit DACs

Surround-sound A/V audio/2-channel music digital outputs: 1 x RCA electrical coaxial & 1 x optical Toslink

RJ45 Gigabit Ethernet

9-pin D male RS232 Serial port (XiVA-Link control protocol)

USB 2.0 ports

3.5mm/0.14in mini-jack IR input

IEC mains socket: 110-230V AC

Dimensions: 430mm/16.9in(W) x 98mm/3.86in/2RU (H) x 326mm/12.8in(D) including feet (10mm/0.39in) and excluding rack mountings

All information subject to change without notice.

The number of simultaneous MP1000-based video or audio sources supported by a single MS5000 is dependent on factors such as the media content, network usage by other devices, the type of networking equipment and the network settings.